
C-CAST™
STRENGTH FOR TOMORROW


Cell: (442) 238-6890 & (346) 522-5639
Office: (877) 712-3722
Email: rerdmann@cescausa.com
Email: sales@cescausa.com

PRECAST CONCRETE

11" x 18" x 18"-T15/T22

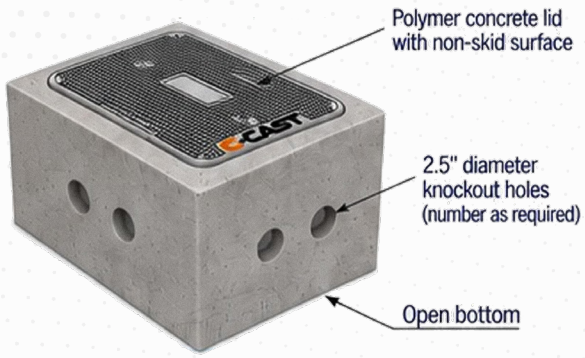


ISOMETRIC VIEW

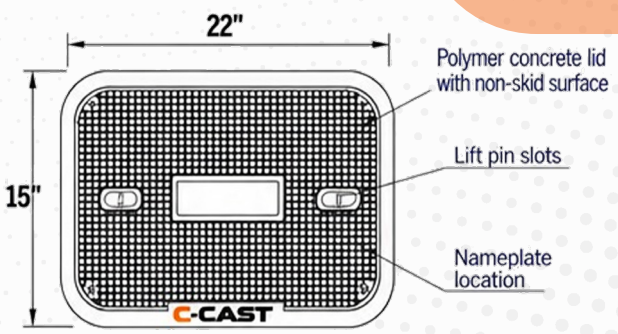


LID DETAILS




CATEGORY	PROPERTY	SPECIFICATION
Technical & Material Properties	Reinforcement	Steel Reinforcement
	Compressive Strength	4400 PSI
	Setting & Hardening	Rapid setting and hardening
	Resistance & Durability	Weather & UV resistant, resistant to temperature changes
	Material Integrity	Non-corrosive, non-shrinking
	Maintenance	Low maintenance
Lid	Lid Features	Lift pin slots / Nameplate location
General Specifications	Color	Gray
	Internal Dimensions	11″ × 18″ × 16″
	External Dimensions	15″ × 22″ × 18″
	Wall Thickness	2″ (per design)
	Material	Precast hydraulic concrete
	Knockouts	2.5″ diameter (number as required)
Applications	Ideal for	Utility & Infrastructure Applications
Available	Lid Options	Iron Cast, Galvanized Steel or Polymer Concrete



TOP VIEW



FRONT VIEW



SIDE VIEW

BABA Certification
Domestic Manufacturing Requirements

ANSI American National Standards Institute

SCTE Society of Cable Telecommunications Engineers a subsidiary of CableLabs®

SBA U.S. Small Business Administration SERVICE-DISABLED VETERAN-OWNED CERTIFIED

MINORITY BUSINESS MBE CERTIFIED ENTERPRISE

MADE IN USA